




Artikelnummer/Itemnumber: 11278VG

Tarifnummer Export: 73084000 | Frachtkategorie: A

Geländerpfosten aus Ø 48er Standrohr

Railing post made of Ø48 mm round tube

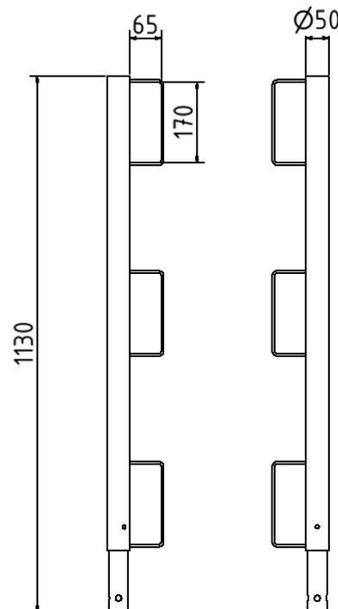

Artikelbeschreibung:

Geländerpfosten aus Ø 48er Standrohr für den Einsatz als Absturzsicherung; mit 6 angeschweißten Bügeln; (Innenmaß: 65x170 mm) zum einhängen von Brettern; Standrohr aus Ø 48,3 mm Rundrohr; Höhe 1,00 m Überflur geeignet für faltgerüstbock System S 1200
faltgerüstbock Universal sowie alle Kurbel-Gerüstböcke

item description:

Railing post for use as fall protection; with 6 welded-on brackets (inner dimension: 65 x 170 mm) for hanging boards; tand tube made of Ø48.3 mm round tube; with welded pipe socket for insertion into sleeve made of Ø48.3 mm round tube; hight 1.00 m above ground; suitable for folding Jack system, folding jack Universal as well as all crank operated caffolding jacks

Verwendungszweck:

Für den Einsatz im Hochbau

designated purpose:

For safety at work in building contrsuction

Technische Daten:

Gewicht: 3,50 kg/St
Material:
S235 JR

Oberfläche:
Feuerverzinkt nach DIN ISO 1461

technical specifications:

weight: 3,50 kg/pc
material:
S235 JR

surface:
hot dipped galvanized acc. to DIN ISO 1461

*Alle Angaben sind Richtwerte (teilweise mit branchenüblichen Rundungen zum besseren Verständnis) und dienen lediglich zum Produktverständnis, nicht aber als Basis zum Bau von Zubehörteilen, Lagergestellen, Adaptierungen, Kombinationsprodukten oä. Alle Angaben sind ohne Gewähr, für evtl. Fehler und resultierende Folgen übernehmen wir keine Verantwortung.
*All data are approximate values (partly with industry-standard rounding for better understanding) and serve only for product understanding, but not as a basis for the design of accessories, storage solutions, adaptations, combination products or the like. All information is without guarantee, for possible errors and resulting consequences we assume no responsibility.